











▶ RELATED PRODUCTS  
**MODECO EXPERT**

	<b>FLOATS &amp; TROWELS</b> MN-73-406 do 410 / MN-73-107 / MN-73-160 do 162 / MN-73-165 / MN-74-188		<b>LEVELS</b> MN-70-504 do 520 / MN- 70-536 do 550 / MN-70-556 do 562
	<b>DIAMOND HOLE SAWS</b> MN-76-206 do 235 / MN-76-306 do 312		<b>CROSS-SHAPED SPACERS FOR TILES &amp; WEDGES</b> MN-76-000 do 016
	<b>TILE CUTTERS</b> MN-75-070 do 290		<b>RUBBER HAMMERS</b> MN-31-121 do 232
	<b>STIRRING PADDLES</b> MN-79-061 do 079		<b>DIAMOND DISCS</b> MN-78-212-220
	<b>TAPE RULES</b> MN-81-023 do 208		<b>PENCILS &amp; MARKERS</b> MN-88-022 do 026 / MN-88-080 do 083

▶ COMMERCIAL INFORMATION

Product code	CLIPS AND WEDGES							PLIERS
	MN-76-410	MN-76-412	MN-76-414	MN-76-420	MN-76-422	MN-76-424	MN-76-426	
Number of clips [pcs./packaging]	200	300	-	50	100	-	30	-
Number of wedges [pcs./packaging]	80	-	200	50	-	100	30	-
Number of pliers [pcs./packaging]	-	-	-	-	-	-	-	1
Quantity in inner box [pcs.]	1	1	1	1	1	1	1	1
Quantity in outer box [pcs.]	4	4	4	10	10	8	10	30

MANUFACTURER  
Rawplug S.A.  
ul. Kwidzyńska 6  
51-416 Wrocław

www.modeco-expert.com  
www.rawplug.com

tel.: +48 (71) 32 60 100  
fax: +48 (71) 37 26 111

**MODECO** EXPERT


**MODECO** EXPERT




MN-76-410    MN-76-422  
MN-76-412    MN-76-424  
MN-76-414    MN-76-426  
MN-76-420    MN-76-430

# TILE LEVELLING SYSTEM

an easy and quick way  
for perfect tile laying




HIGHLIGHTS

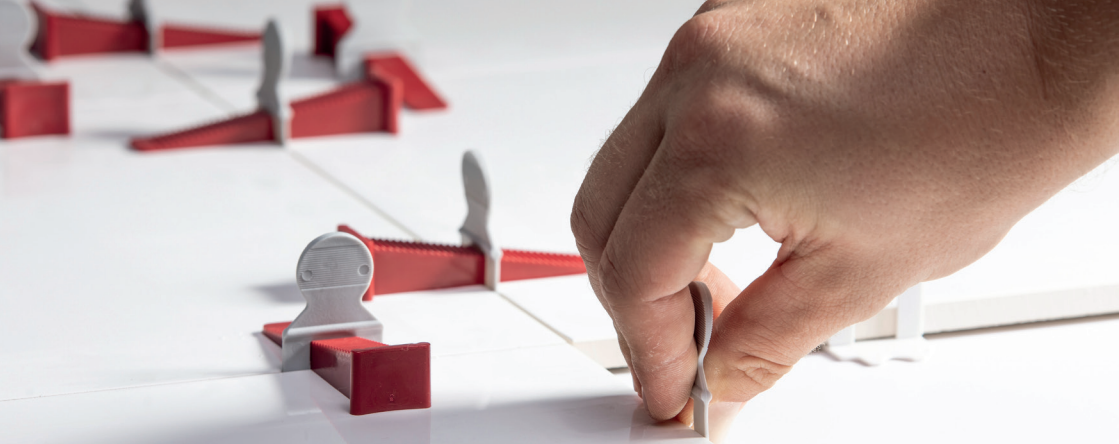


## ► FEATURES AND BENEFITS

strengths, utility properties and functional advantages




**WIDE RANGE OF APPLICATIONS** for 3–14 mm thick tiles makes it possible to level most tiles in use.




**APPROPRIATELY SELECTED CLIP PARAMETERS** make it possible to obtain a very narrow 1 mm grout joint, while the 2 mm thick flat foot allows it to be used even with a very thin glue layer.



**HIGHER PRECISION** of work regardless of the tile size and type.



**PERFECT LEVELLING** of the tiles with regard to one another, compensating for uneven substrates and differences in tile thickness. After the first tile has been levelled, the system makes it possible to keep the next tiles level too.



**WEDGES MADE OF HARD, RIGID PLASTIC** do not scratch the tiles and can be reused many times.



**CLIPS MADE OF DURABLE, FLEXIBLE PLASTIC** adhere perfectly to the tile.




**SPECIAL CLIP DESIGN** with a narrowed section at the foot makes sure that it will break off in a way that does not hinder grouting (the foot of the clip stays under the tile).



**PRECISION PLIERS** make it possible to press the system elements against the tiles with sufficient force.

## ► INSTALLATION STEPS

see how simple and easy to use our system is

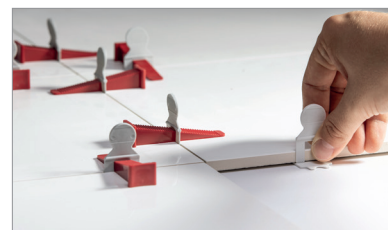


**1** Lay the first tile and level it using a spirit level. Slide clips under its edges at a distance of 4–8 cm from the corner.



**2** Lay further tiles on the clips, adding further clips under the outer edges. A gap thicker than 1 mm can be obtained by using cross-shaped spacers of the appropriate thickness.



**3** Now perform preliminary levelling of the tiles, tapping on them with a rubber mallet and checking with a spirit level. Next, insert the wedges into the clips already placed by sliding them into the hole of the protruding clip.

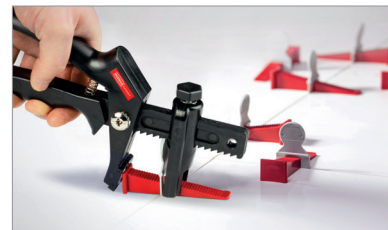

**4** The next step involves tightening the elements with your fingers or pliers and pressing the tiles to the foot of the clip, at the same time levelling them.



**5** After the glue dries, break off the clips by hitting them with a rubber mallet along the gap. Only the flat foot of the clip is left under the tile, which does not interfere with the grouting, while the part of the clip with the wedge breaks off. The wedges should be gathered as they can be reused, while the remains of the clips should be discarded.